


INSTALLATION INSTRUCTIONS FOR BAFFLE PLATE

IMPORTANT: Supplied baffle plate is to be assembled to rear of log base before installation of heater.

Tools required: 1/4" hex socket wrench or nut driver.

1. Prior to mounting log heater into firebox and prior to connecting gas supply, mount baffle plate to rear of log base as shown in illustration.
2. Partially loosen (approximately 1 1/2 turns, do not remove) the four hex head screw indicated.
3. Position baffle plate on log base by aligning 4 slots on baffle plate with 4 loosened screws.
4. Push baffle plate fully onto log base so that bottom of slots contact screws.
5. Retighten 4 screws securely.
6. Install log set heater per installation instructions supplied with heater.

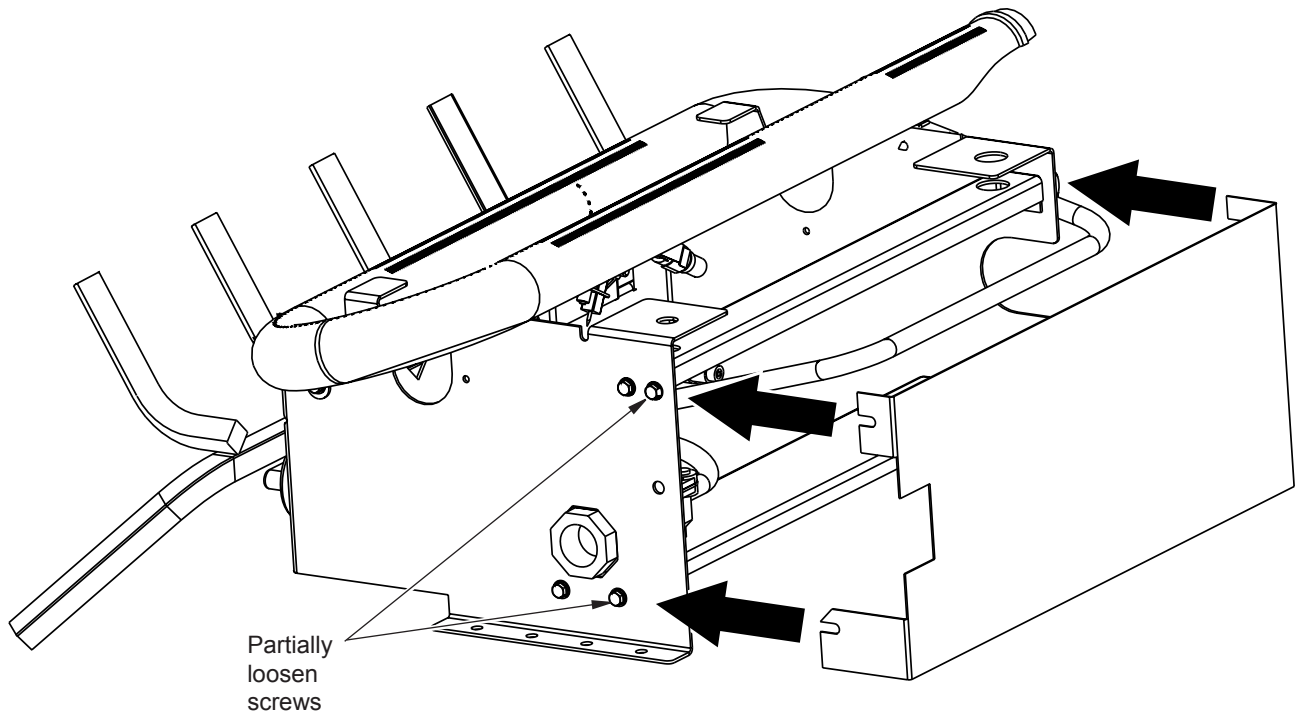

104090 01
NOT A UPC

DESA
HEATING PRODUCTS™

2701 Industrial Drive
P.O. Box 90004
Bowling Green, KY 42102-9004
www.desatech.com
1-866-672-6040

104090-01
Rev. B
02/07