




E360DG & E420DG OUTDOOR GAS FIREPLACE

Appliance Specifications

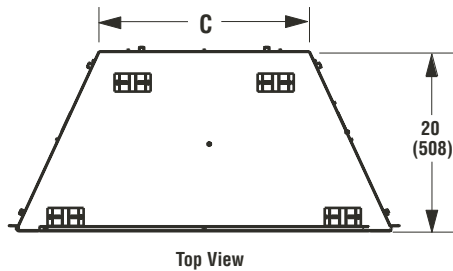

Dimensions - Inches (millimeters)			
Model No.	A	B	C
E360DG	37 (940)	41-3/4 (1061)	23-1/2 (597)
E420DG	43 (1092)	47-3/4 (1213)	29-1/2 (749)

Weight And Volume		
Model	Ship. Weight (lbs)	Shipping Volume
E360DG	200 lbs	35 Cu. Ft.
E420DG	230 lbs	38 Cu. Ft.

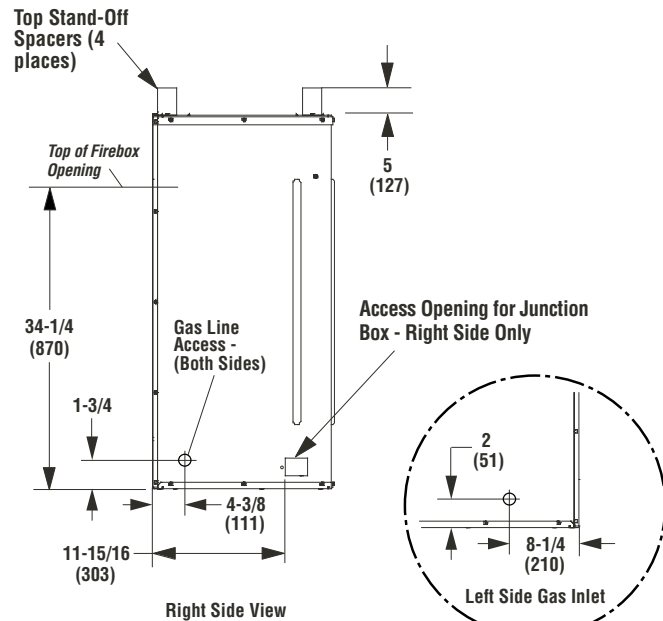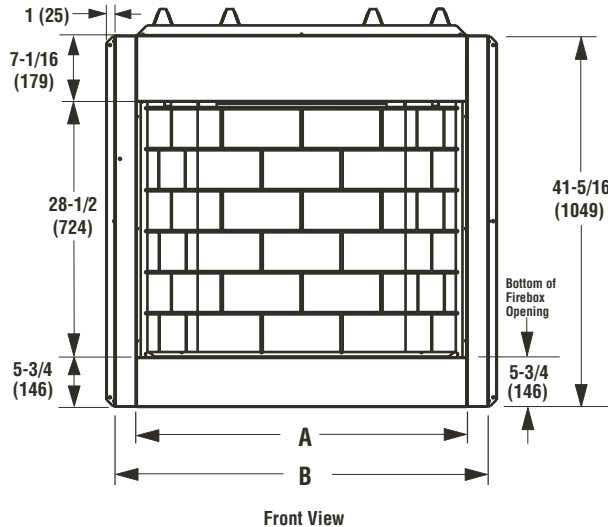

Firebox Finishes

There are a wide variety of "finished looks" for your outdoor fireplace, from formal wall decor with elaborate mantels to rustic wood paneling or warm brick facings.


Only noncombustible materials like marble, stone, tile, brick, etc. may overlap the front facing. Seal all joints between the black facing and wall surrounds to prevent air intrusion. Use noncombustible caulking materials only to seal the metal facing to the surround material on the finished wall. See Figure.

CAUTION: DO NOT BLOCK THE FACE OPENING ON THESE FIREBOXES. DOING SO MAY CREATE A POTENTIAL FIRE HAZARD.

Note: The Lennox Elite® Series Outdoor Gas Fireplace is designed for outdoor use. It may also be installed in screened porches and lanais that meet these minimum requirements:

Minimum porch area - 96 square feet
Minimum ceiling height - 7 feet 8 inches

A minimum of two (2) walls can be screened but must be open to outside ventilation.
Minimum screen area - 64 square feet
Minimum screen top height - 6 feet 8 inches

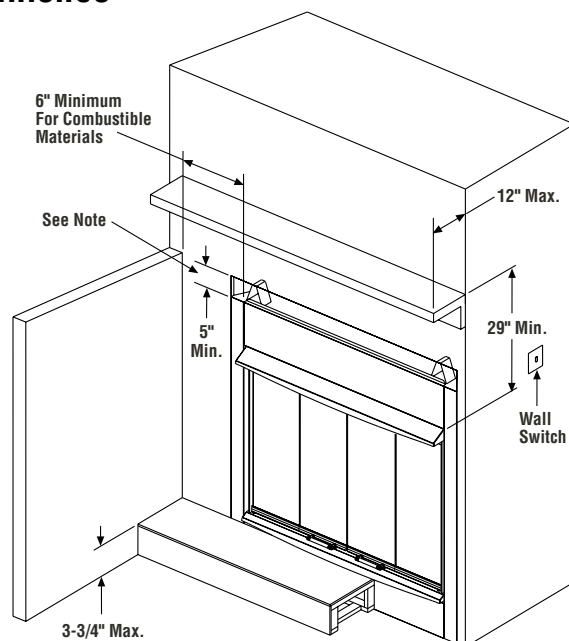


Note: The Area Above The Face To The Top Of The Spacers Must Be Non-Combustible Materials

LENNOX
HEARTH PRODUCTS


E360DG & E420DG OUTDOOR GAS FIREPLACE

FRAMING SPECIFICATIONS

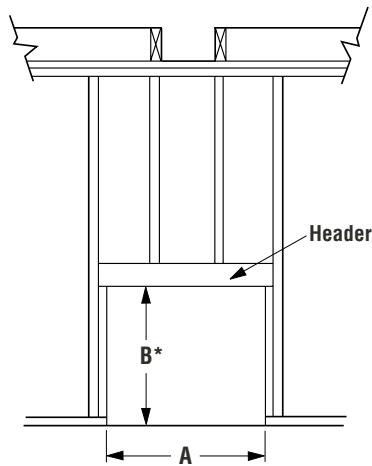

* Increase Framing Height By 3/4"
When Using Optional Drain Pan


Corner Installation

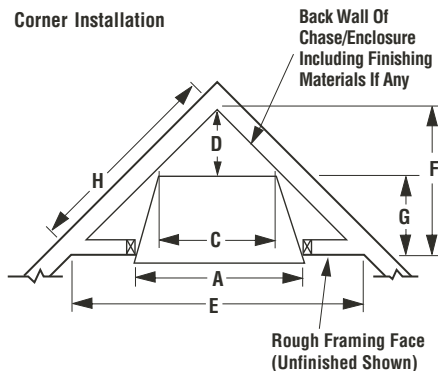

Parallel Installation


Rough Framing Face
(Unfinished Shown)

Back Wall Of
Chase/Enclosure
Including Finished
Materials - If Any

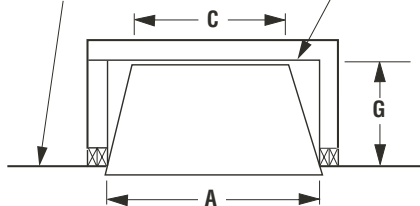


Opening	E360DG	E420DG
A	42-3/4" (1086)	48-3/4" (1238)
B	46-1/2" (1181)	46-1/2" (1181)
C	23-9/16" (599)	29-9/16" (751)
D	11-1/4" (286)	14-1/4" (362)
E	63-1/2" (1613)	69-1/2" (1765)
F	31-3/4" (807)	34-3/4" (883)
G	20-1/2" (521)	20-1/2" (521)
H	44-3/16" (1122)	49-1/8" (1248)

TYPICAL INSTALLATION

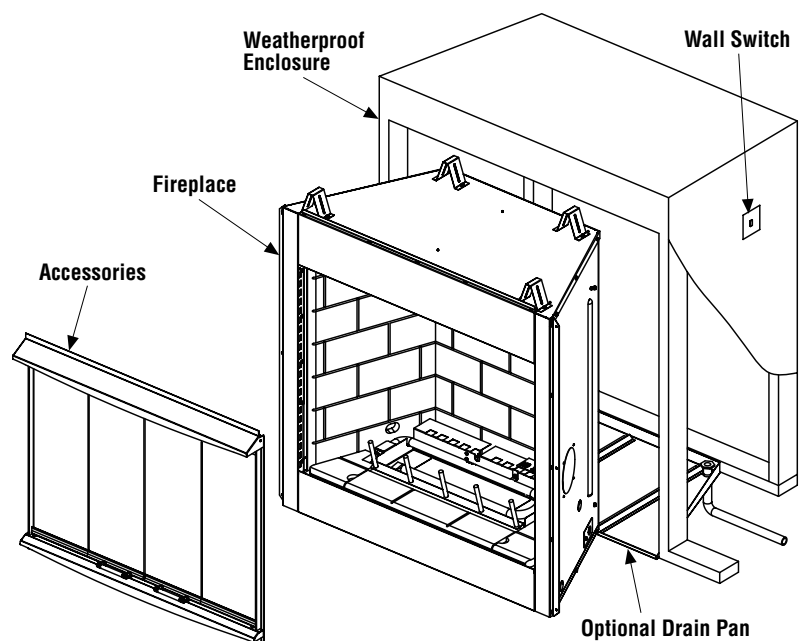

CLEARANCES

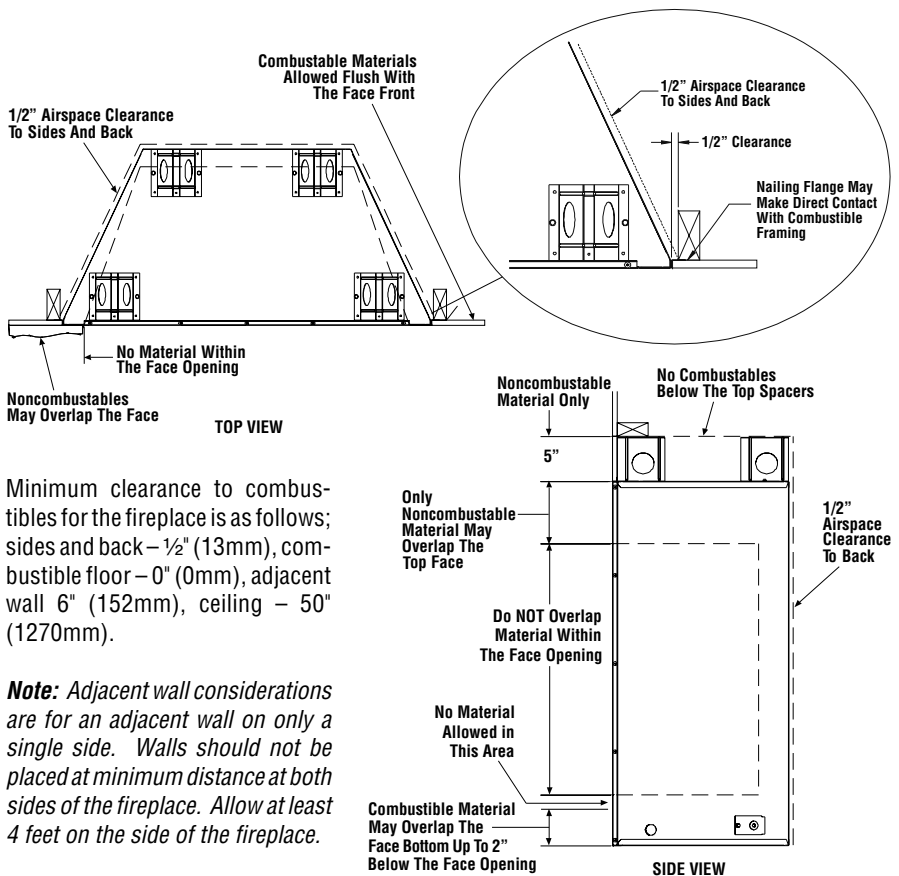

LENNOX
HEARTH PRODUCTS