H1000-1
GHE10000-1
H1000IS
H1000IS-1

WIRING DIAGRAM FOR

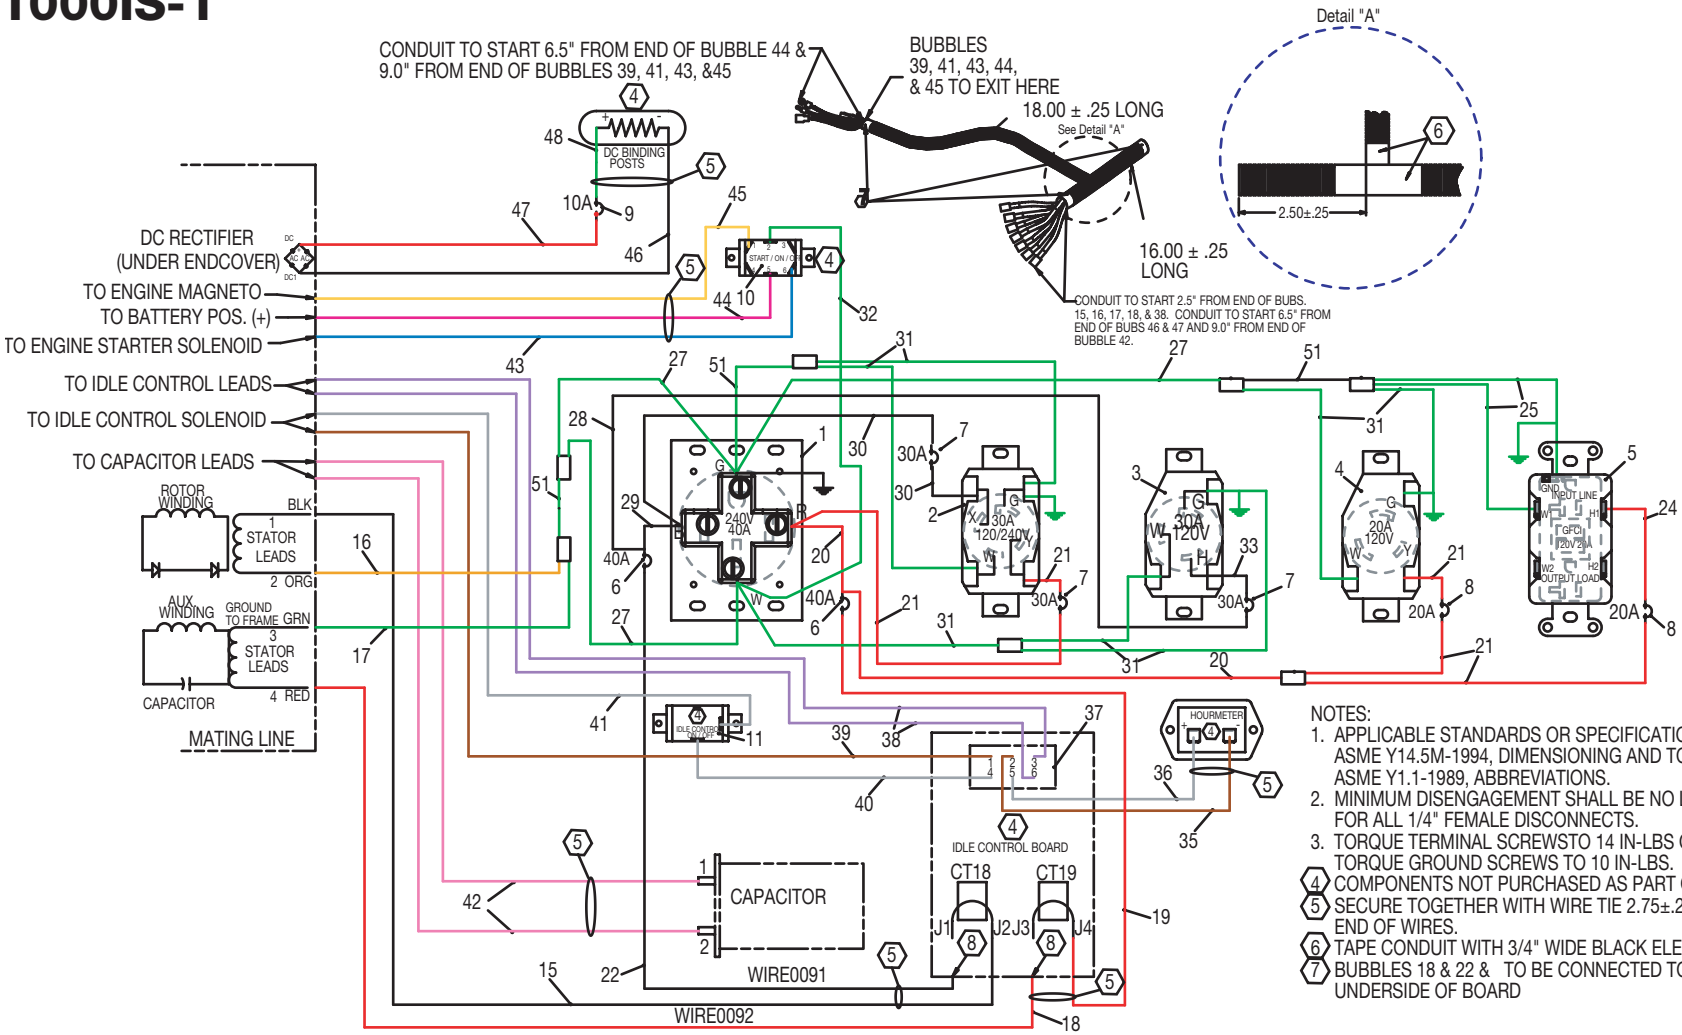

NOTES:
1. APPLICABLE STANDARDS OR SPECIFICATIONS: ASME Y14.5M-1994, DIMENSIONING AND TOLERANCING. ASME Y1.1-1989, ABBREVIATIONS.
2. MINIMUM DISENGAGEMENT SHALL BE NO LASS THAN 3 LBS FOR ALL 1/4" FEMALE DISCONNECTS.
3. TORQUE TERMINAL SCREWSTO 14 IN-LBS ON DUPLEXES. TORQUE GROUND SCREWS TO 10 IN-LBS.

(4) COMPONENTS NOT PURCHASED AS PART OF ASSEMBLY.
(5) SECURE TOGETHER WITH WIRE TIE 2.75±.25 FROM END OF WIRES.
(6) TAPE CONDUIT WITH 3/4" WIDE BLACK ELECTICAL
(7) BUBBLES 18 & 22 & TO BE CONNECTED TO LEADS ON UNDERSIDE OF BOARD

8/26/03