

INSTALLATION INSTRUCTIONS FOR THE MPLDV-30-PVAK (H7664)


FIREPLACE ADAPTER KITS (For LPVK-110)		
Fireplace Model	Kit Catalog Number	Kit Contents
MPLDV-30	H7664 (MPLDV-PVAK)	1/2" Restrictor 

Table 1

KIT CONTENTS

Restrictor 1/2" - 1 each

TOOLS NEEDED - 5/16" Nut Driver

GENERAL INFORMATION

This kit provides components that are designed to adapt to the MPLDV-30 fireplace to be used with the Lennox LPVK-110 Power Vent Kit.

ALL WARNINGS AND PRECAUTIONS IN THE INSTALLATION AND OPERATION MANUAL PROVIDED WITH THE APPLIANCE APPLY TO THESE INSTRUCTIONS.

INSTALLATION INSTRUCTIONS

Step 1. Remove the glass door per instructions in the MPLDV Care and Operation Instructions Manual.

Step 2. Using a 5/16" nut driver, refer to *Figure 1* and remove two screws securing the down-draft baffle. Discard the down-draft baffle. Replace the two screws in the remaining holes.

Step 3. Position the restrictor within the fireplace vent from above with the vent grips up, this restrictor is self centering and securing (see *Figure 2*). If the restrictor fails to positively engage, remove it from the vent and bend the vent grips outward and then try again.



Step 4. Reinstall the glass enclosure panel per instructions in the Care and Operation Instructions manual provided with appliance.

Step 5. Refer to the instructions (manual number 506022-01) provided with the Power Vent Kit (LPVK-110), to complete the task of attaching the Power Vent Kit to the MPLDV-30 Fireplace.

VENT RUN PARAMETERS	
Any Vent Run	Use 1/2" Restrictor Provided With This Kit

Note: See Power Vent Kit manual for maximum and minimum vent run parameters.

Table 2

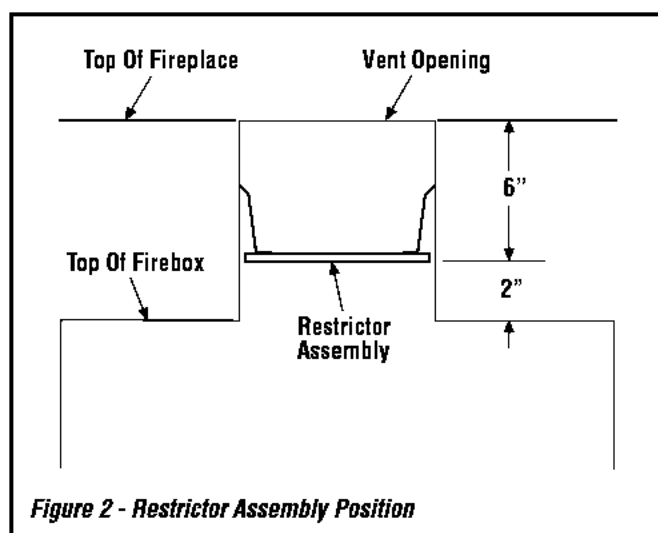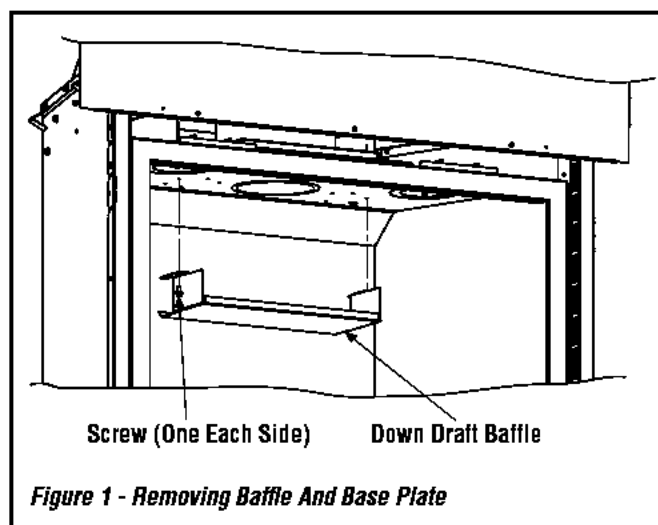

NOTE: DIAGRAMS AND ILLUSTRATIONS ARE NOT TO SCALE.

Lennox reserves the right to make changes at any time, without notice, in design, materials, specifications, prices and also to discontinue colors, styles and products. Consult your local distributor for fireplace code information.