

# Montecito™

## EPA Wood Burning Fireplaces Specifications

PRODUCT REFERENCE INFORMATION	
Model: MONTE, Cat. No. H4841	
Weight	300 lbs
Height	36"
Width	36"
Depth	24-1/2"
Firebox W x H x D measured in front	22" x 11-3/4" x 12"
Chimney weight ASHT* (6" dia)	6.25 lb/ft.
Chimney weight AC* (6" dia.)	3.25 lb/ft.

\*Available from Security Chimneys™

FRAMING DIMENSIONS Fireplace Opening Width		
A	36-1/4"	921 mm
B	42"	1067 mm
C	30-1/16"	764 mm
D	13-1/2"	343 mm
E	77"	1956 mm
F	37-1/2"	953 mm
G	*24-1/2"	603 mm
J	53-3/4"	1365 mm


\* Total depth is 25 inches including the backspacer minus 1/2 inch for drywall to be flush with the facing.




Intertek

These fireplaces have been tested and listed by ITS - Listing mark, Warnock Hersey to ULC-S610 & UL-127.



Report No. 307-4084  
EPA Cert. No. 537

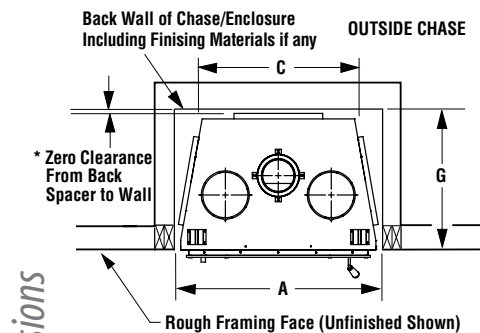

Framing Dimensions

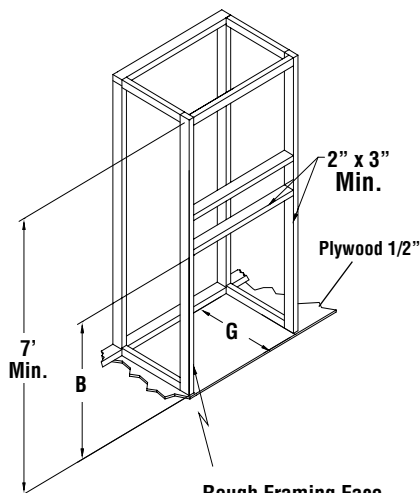

Rough Framing Face  
(dimension includes finish material inside framing, if any)

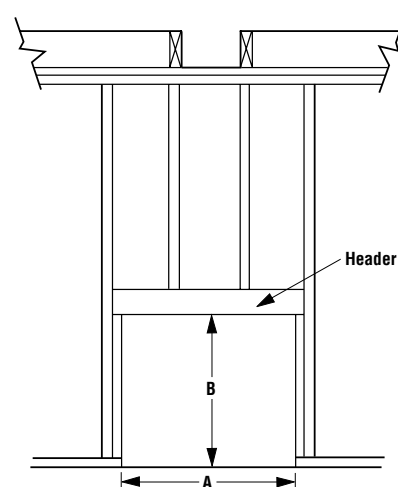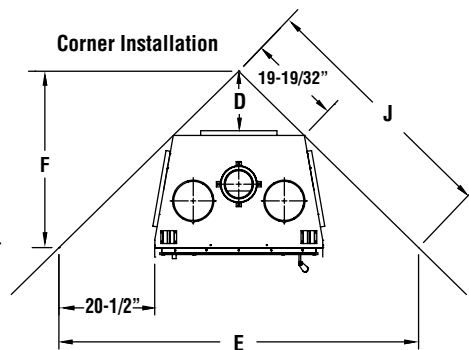

### Notes

Diagrams, illustrations and photographs are not to scale - consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

All framing dimensions calculated for 1/2" dry wall at the fireplace face. If sheathing the chase or finishing with other thickness materials, calculations will need to be made.

\* The fireplace must not be in contact with any insulation or loose filling material. Cover the insulation with drywall panels around the fireplace.

### PARTS REQUIRED

- 6" diameter chimney \* - Model ASHT+, S-2100+, HT6000+, HT6103+ or AC manufactured by Security Chimneys International only, including:
  - Chimney lengths
  - Elbows (where necessary)
  - Associated components as per these installation instructions
- Decorative Door - Required (Order Separately)
  - Available in black, gold or brushed nickel
- Front Facade Kit - Required (Order Separately)
  - Available in black, brushed nickel or hammered steel
- UZY5 blower (included)
- VRUW Blower Speed Control (included)
- Outside air kit (Included)


### OPTIONAL EQUIPMENT

- Additional Equipment
  - AC Chimney Adaptor \* (required if using AC Chimney)
  - AC chimney outside air kit
  - Gravity venting system
  - Rigid firescreen

\*Available from Security Chimneys™

Listing Information


Fireplace Dimensions

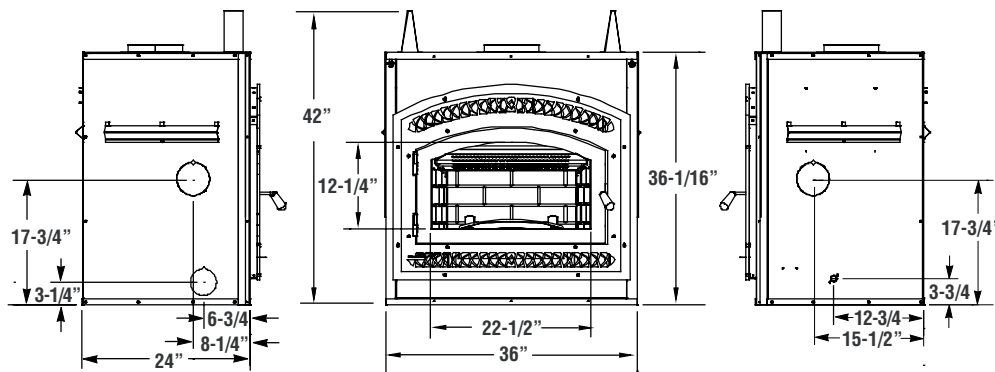

**LENNOX**  
HEARTH PRODUCTS

## EPA Wood Burning Fireplaces Specifications

Typical Installations

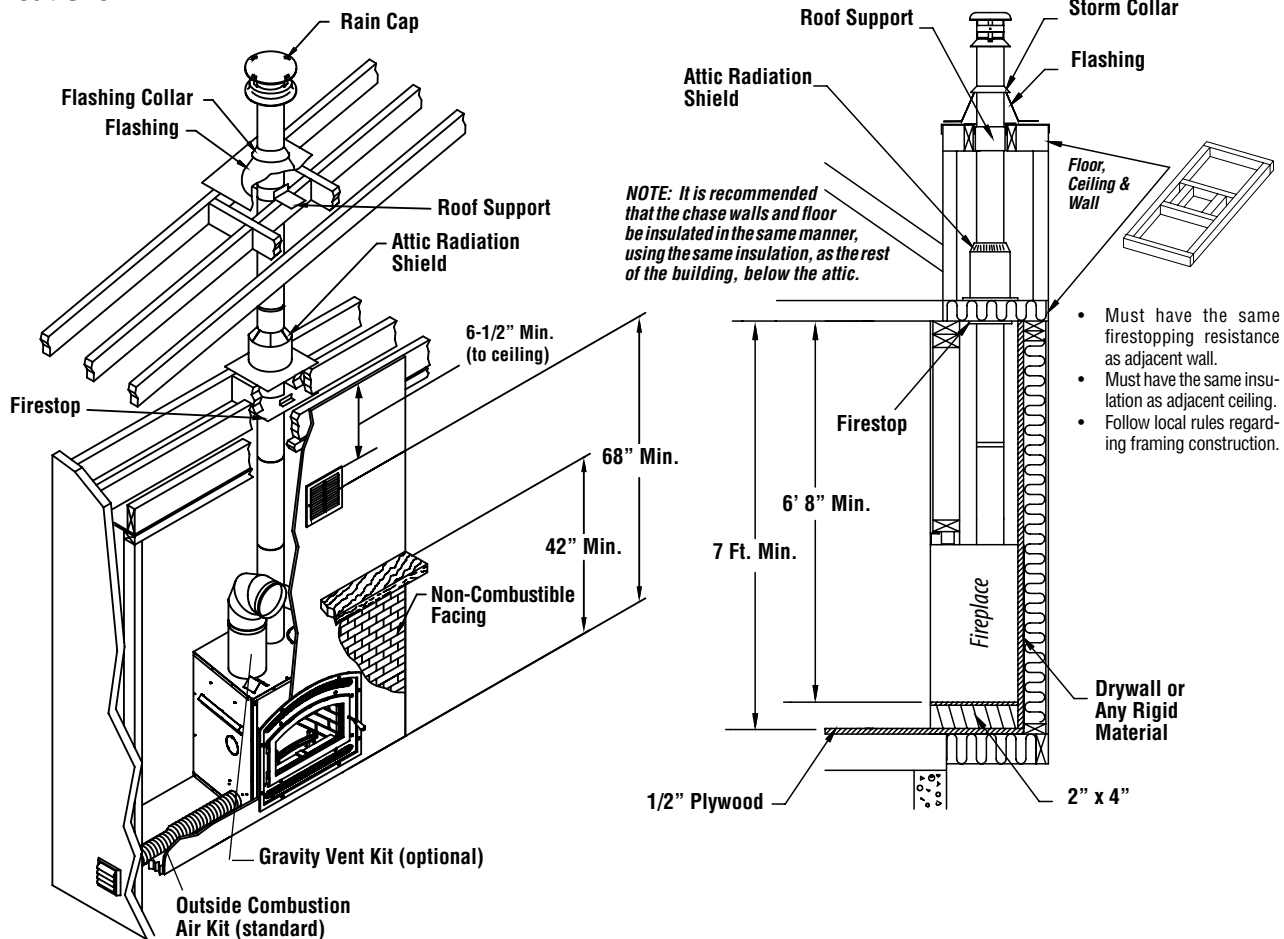

### CLEARANCE TO COMBUSTIBLES

The following clearances meet the minimum requirements for a safe installation:

**Side wall:** 17" (324 mm) measured from the fireplace side.

**Ceiling:** 6' 8" (2032 mm) measured from the base of the fireplace.


**Fireplace enclosure:**

**Bottom:** 0"  
**Side:** 0" to spacer  
**Back:** 0" to spacer

**Top:** Do not fill the space above the fireplace with any material (Except the wood framing)

**Chimney:** 2" (50 mm)

**Mantel:** 42" (1067 mm) measured from the base of the fireplace.

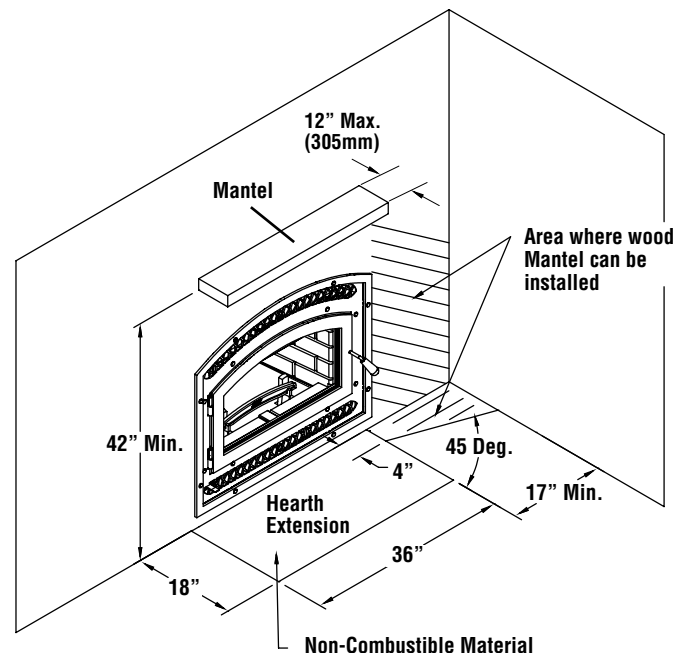

Combustible Clearances