


MHD35DMN AND MHD35DMP

MANUFACTURED HOME DIRECT-VENT FIREPLACES

Framing Dimensions

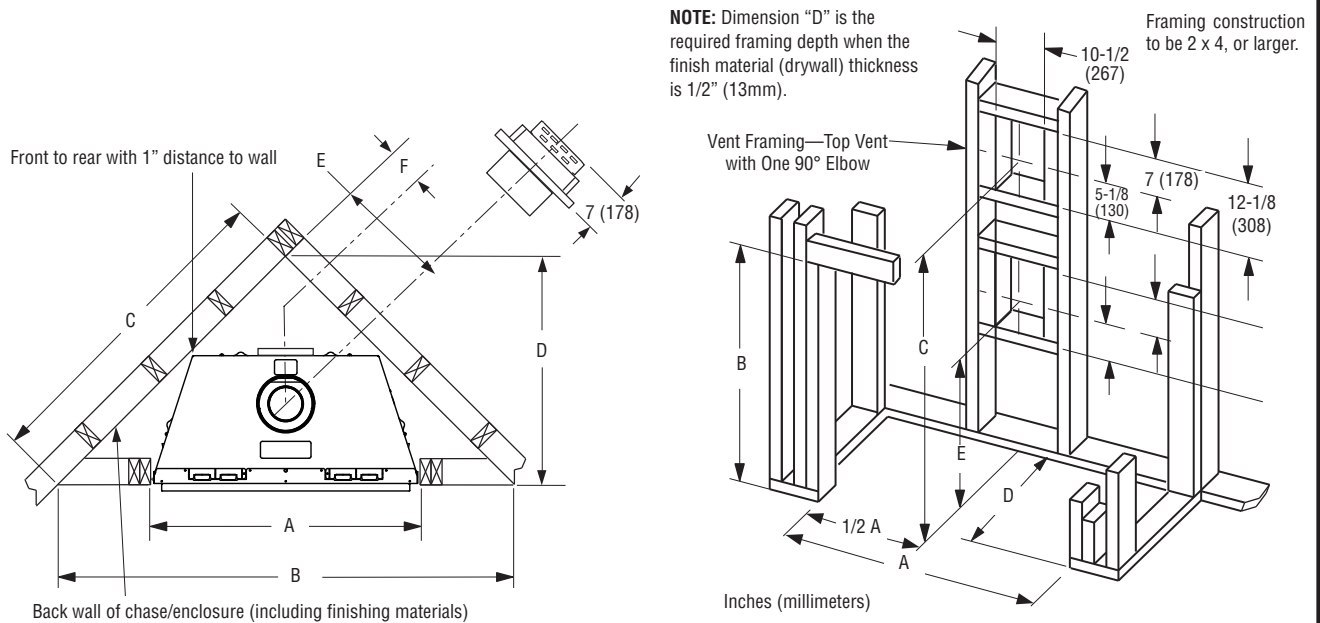

C = Minimum height of top vent installations
E = Minimum height of rear vent installations

Model	A	B	C	D	E	F
35" Models	38 (966)	59-1/2 (1511)	42-1/8 (1070)	30-1/4 (768)	14-1/4 (362)	6-5/8 (168)


Model	A *	B	C	D	E
35" Models	38 (966)	38-5/8 (981)	38-3/4 (984)	18 (447)	23-3/8 (594)

*Minimum opening size; additional 1/8" per side is recommended.

NOTE: Framing specifications do NOT apply for flexible venting. When using flexible venting, refer to the kit requirements for framing specifications.

NOTE: When finishing the area around the hood, 5/8" clearance above hood is required for hood installation.

Fireplace Dimensions

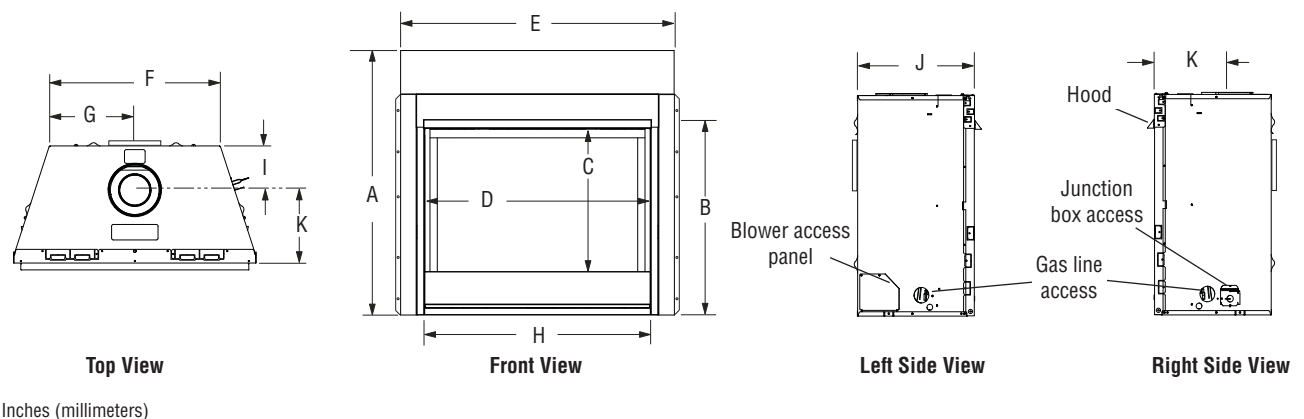

Model	A	B	C	D (door)	E	F	G	H	I	J	K
35" Models	38-1/2* (978)	28-3/4 (730)	22-1/4 (565)	32-3/8 (822)	37-7/8 (962)*	25 (635)	12-1/2 (317)	32-7/8 (835)	6-7/8 (175)	17 (432)	10-1/8 (257)

*Dimensions include top and side panels (shipped installed)

NOTE: DIAGRAMS & ILLUSTRATIONS ARE NOT TO SCALE.

MHD35DMN AND MHD35DMP

Product Information

Cat. No.	Model	Weight	Cu. Ft.
F2698	MHD35DMN	114 lb.	14.3
F2699	MHD35DMP	114 lb.	14.3

Listing Information




Listed by PFS Corporation to - ANSI Z21.88 (in Canada, CSA-2.33), and CAN/CGA-2.17-M91 in both USA and Canada, as a vented gas fireplace heater.


Report No. F13-094

Clearances

Mantel Clearances

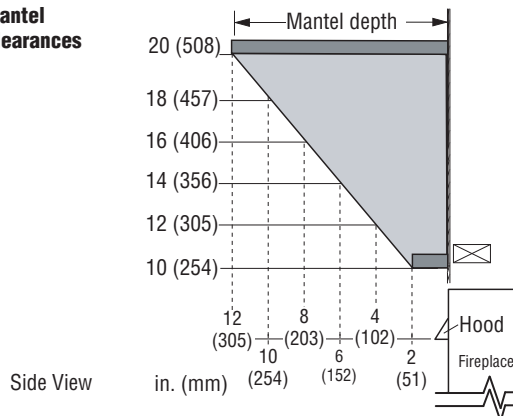

Side Wall Clearances

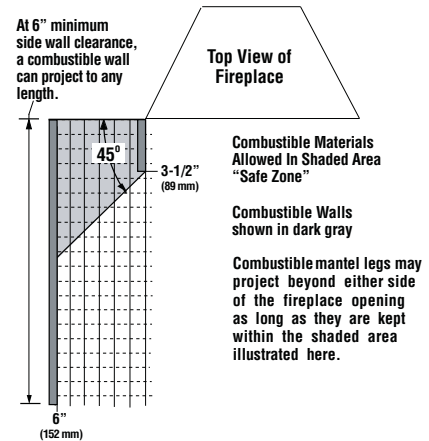


Shelf Height

Model	Top Vent with one 90° Elbow		Alternative Rear Vent applications
	Secure Vent®	Secure Flex® (flex elbow)	Secure Vent®
35" Models	47" (1194 mm)*	49" (1245 mm)*	41" (1042 mm)**

- * Includes 3" clearance to combustibles (required above vent components)
- ** In alternative, Rear Vent applications, Top Vent will be sealed as detailed in the Installation and Operation manual.


Specifications and clearances are subject to change without notice. Refer to Installation and Operation Manual before installation of these appliances for updated dimensions and instructions.

Do not insulate the space between the appliance and the area above it.




Shelf Above Fireplace With Rear Venting

Do not insulate the space between the appliance and the area above it.




Shelf Above Fireplace With Top Venting


Venting

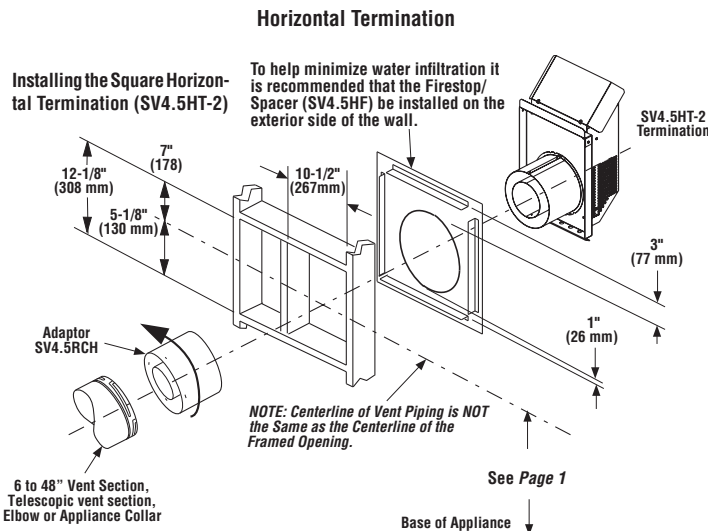

Vertical Termination



Roof Framing



Uses 4.5" / 7.5" Secure Vent® Rigid and Secure Flex® Direct-Vent Components

Typical Installations

