

SSDVPF

SPECIFICATIONS

Natural & Propane Gas BTU Input	37,500 High 30,000 Low
Co-axial DV Vent Size	4 1/2" Inner 7 1/2" Outer

NOTES

• Annual Fuel Utilization Efficiency

Due to Lennox' ongoing commitment to quality, all specifications, ratings and dimensions are subject to change without notice.

Appliance has a factory-installed vent seal cap in each flue outlet.

PRODUCT REFERENCE INFORMATION

Cat. No.	Model	Ship Wt.	Ship. Volume
H3335	SSDVPF-CNM	270 lbs	52W x 27D x 44 1/2H (36.2 cu.ft.)
H3336	SSDVPF-CNE	270 lbs	52W x 27D x 44 1/2H (36.2 cu.ft.)


EFFICIENCIES

	SSDVPF
ENERGUIDE	58 % (NG) 61 % (LP)
Steady State	72 % (NG) 73 % (LP)
• AFUE	68 % (NG) 68 % (LP)


Pitch	C	D
0/12	10 1/2 in. (267 mm)	10 1/2 in. (267 mm)
6/12	10 1/2 in. (267 mm)	12 in. (305 mm)
12/12	10 1/2 in. (267 mm)	17 3/4 in. (451 mm)

Appliance Specifications

- Inches (millimeters)
- Minimum Framing Stud Size is 2 x 4
- See right side view of fireplace below for gas line inlet location options.

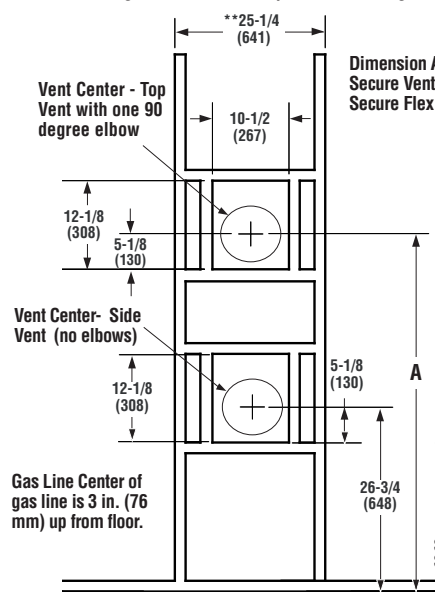


Fireplace Framing Specifications

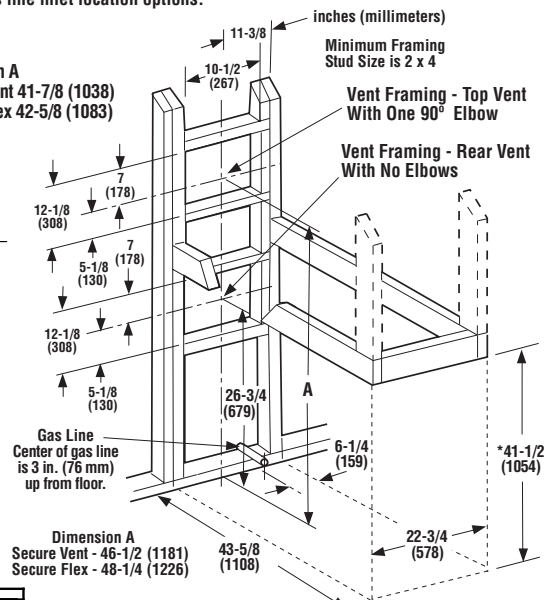

* This dimension can be reduced to 41 inches (1041 mm). This results in 0 in. (0 mm) clearance between framing and unit framing spacers. (The 41 1/2 in. dimension permits easier fireplace installation, if unit is installed after framing is erected).


** This dimension based on 5/8" drywall. For 1/2" drywall use 25-1/2" (648 mm). The finished dimension should be 26-1/2" (673 mm). See also, *Side Vent Seal Cap* note below.






FINISH WALL BRACKET

(Front, back, and left edge of unit top)

Vertical Venting Through Ceiling:
Frame ceiling opening - Use a plumb line from the ceiling above the appliance to locate center of the vertical run. Cut and/or frame an opening, 10-1/2" x 10-1/2" (267 mm x 267 mm) inside dimensions, about this center mark. See *Ceiling Framing* on Page 2.

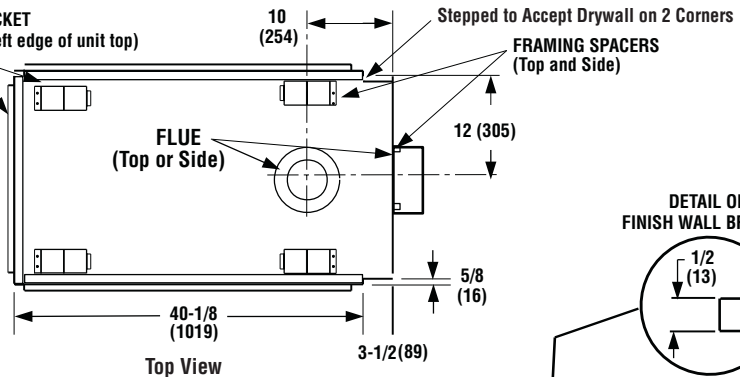

DETAIL OF FINISH WALL BRACKET

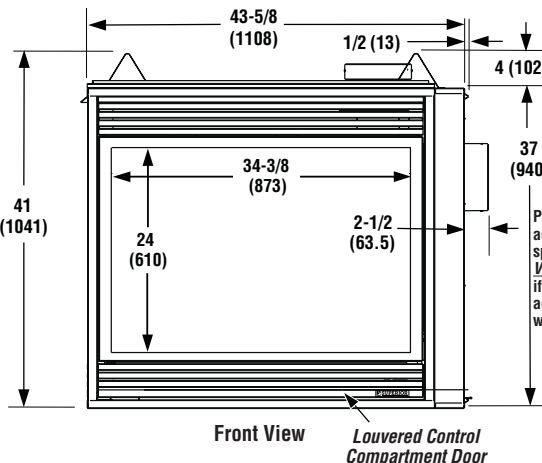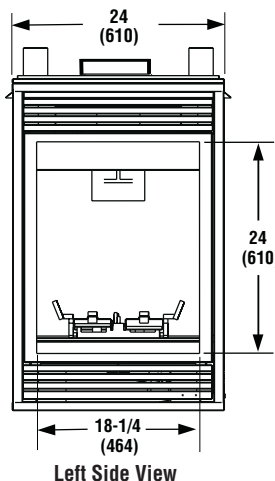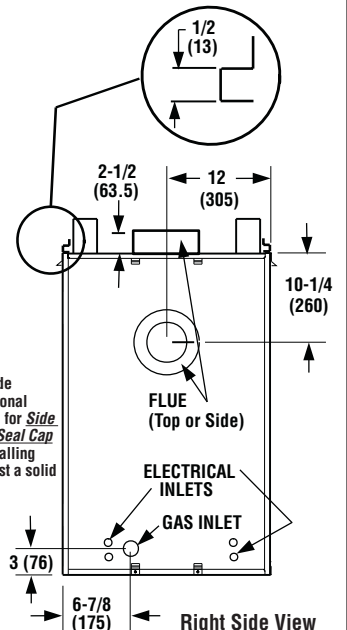



Note: Diagrams, illustrations and photographs are not to scale - Consult Installation Instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

SSDVPF

Millivolt Model
SSDVPF-CNM-B

Electronic Model
SSDVPF-CNE-B

Appliance Clearances DIRECT VENT PENINSULA VIEW FIREPLACE

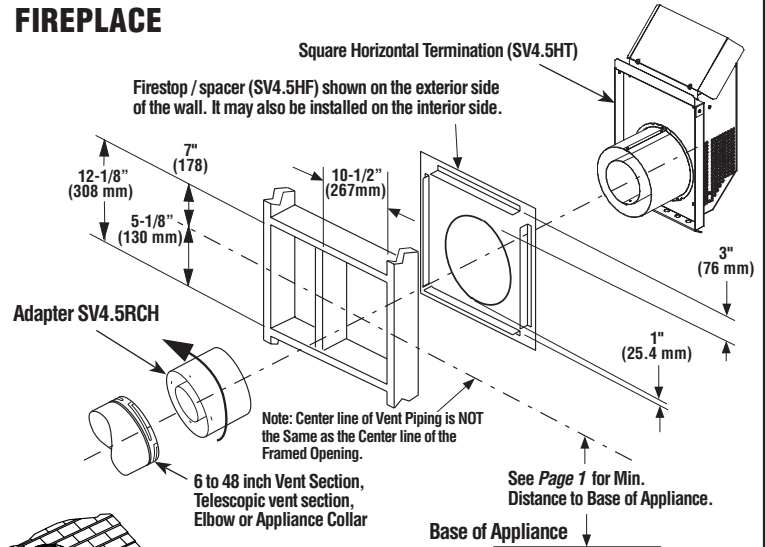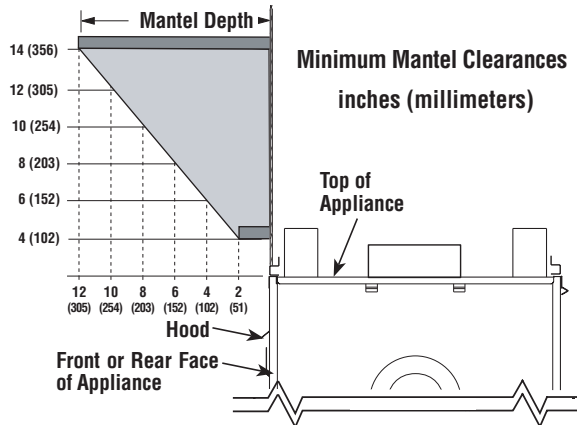

MINIMUM CLEARANCES Inches (millimeters)	
Sides	1/2 (13)
Top Spacers	0 (0)
Floor	0 (0)
Bottom of Appliance To Ceiling	64 (1626)
Vent	3 (76) Top * 1 (25.4) Sides & Bottom
SERVICE CLEARANCES Feet (meters)	
Front & Back Faces	3 ft. (0.9 m)


**Note: 3 in. (75 mm) above any horizontal / inclined vent component.*

Side Clearances - Combustible materials may project beyond the sides of the fireplace opening as long as they are kept within the shaded areas (See Min. Side Clearances below).

Maintain clearances from appliance to combustible materials as detailed in the **Table** on the left, with the following exception: When the appliance is installed with one side

flush with a wall, the wall on the other side of the appliance must not extend beyond the front edge of the appliance. In addition, when the appliance is installed in the middle of a room, the side walls surrounding the appliance must not extend beyond the front edge of the appliance.

Specifications and clearances are subject to change without notice. Refer to Installation Manual before installation of these appliances for updated dimensions and instructions.

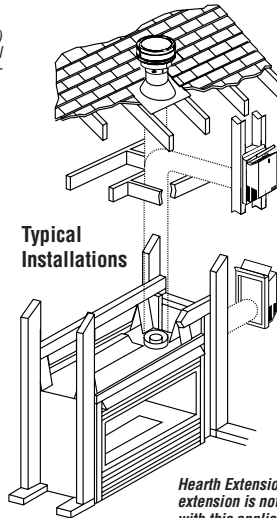

Vertical Termination Cap SV4.5CGV-1 (rated for high winds and freezing conditions)

See Roof Framing on Page 1

Ceiling Framing (See Roof Framing on Page 1)

* Ceiling Firestop / Spacer (SV4.5VF)

Hearth Extension - A hearth extension is not required with this appliance.


Minimum Side Clearances

Combustible Materials Allowed In Shaded Area "Safe Zone." Combustible Walls shown in dark gray.


At 14" minimum side wall clearance, a combustible wall can project to any length.

At 8 1/4" side wall clearance, a combustible wall can project 12"

Top View Fireplace

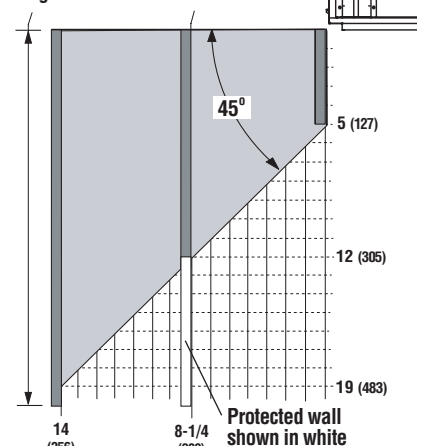

Minimum Distance to Unprotected Side Wall

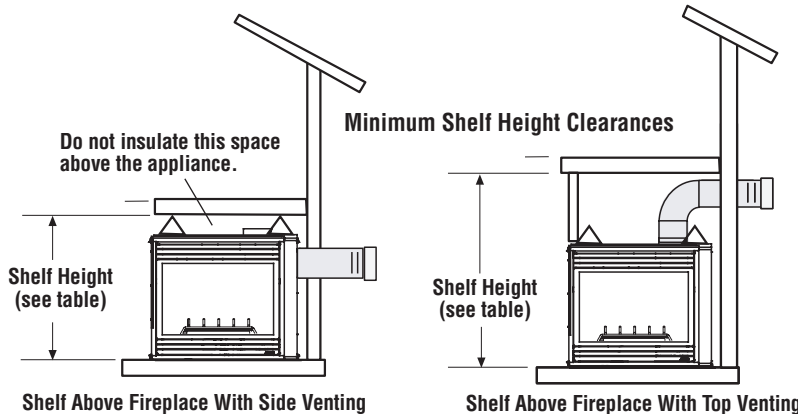

Model No.	Shelf Height - Inches (millimeter)		
	Side Vent - Straight Out Back	Top Vent - with One 90 Degree Elbow	
	Secure Vent & Secure Flex	Secure Vent	Secure Flex
SSDVPF	41 1/8 (1045)	53 1/2 (1359)	55 1/4 (1403)