

DESA

Safety Screen Kit DS37, DS41, CDS37, and CDS41

For Installation of Safety Screen Kits for 34", 37", and 41" Fireplace

The Safety Screen Kit contains the following:

- 1-Safety Screen
- 2-Lower Screen Clips
- 1-Upper Right Screen Clip
- 8-Screws
- 1-Upper Left Screen Clip

If any of these parts are missing or damaged, contact the dealer where you purchased this kit. If they cannot supply original replacement parts, call DESA International's Parts Department at 1-800-972-7879 for information.

1. Remove the top louver from the fireplace by lifting upward and out (see Figure 1).
2. Remove the screws from the three tabs at the top of the glass door. Hold the door securely to keep it from falling forward.
3. Grasp door by both sides and ease it upward off of the lower bracket (see Figure 2).
4. Lay glass door assembly on flat surface with the front side up. Lay the safety screen on top of the glass door assembly with spline (metal strip around screen) facing up (see Figure 3).

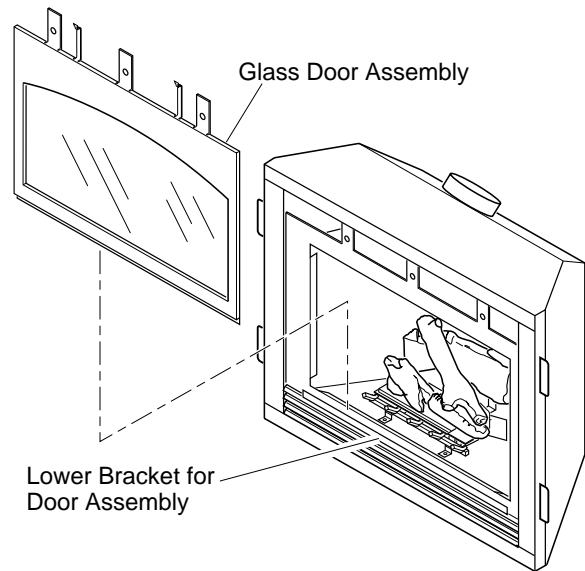


Figure 2 - Removing Glass Door Assembly

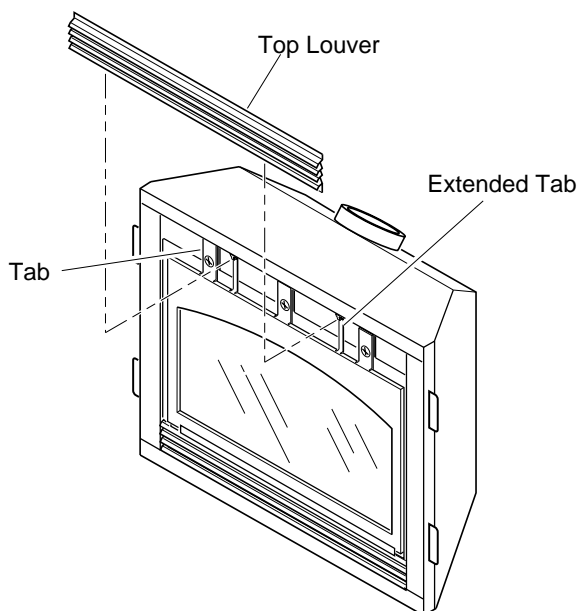


Figure 1 - Removing/Replacing Top Louver

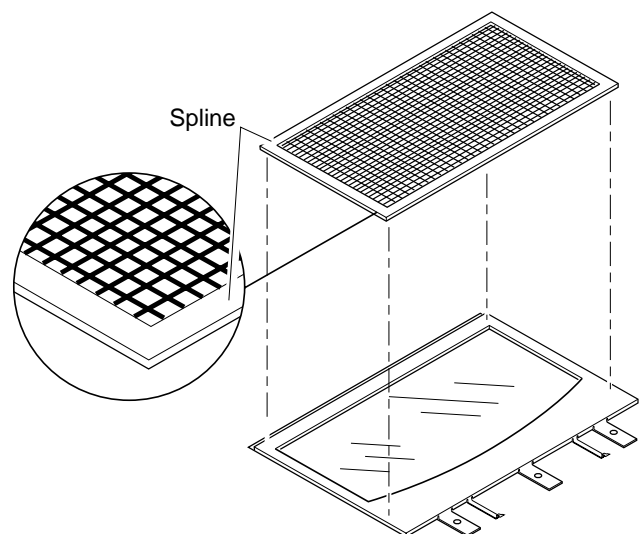


Figure 3 - Placing Safety Screen on Glass Door

Continued

5. Locate holes on upper right side of screen. Place upper right screen clip over safety screen and glass door assembly. Top flange of screen clip should rest on upper edge of glass door assembly. Secure with screws (see Figure 4).
6. Install upper left screen clip using the same method described in step 5.
7. Locate holes on lower right side of screen. Place lower screen clip over safety screen and glass door assembly. Secure with screws (see Figure 5).
8. Install lower left screen clip using the same method described in step 7.
9. Replace glass door assembly (with safety screen attached) by carefully placing it on the lower bracket above the lower louver. Carefully secure the door by replacing the three screws into the tabs.
10. To replace the top louver, insert the extended tabs at the top of the glass door assembly into slots on louver. Gently lower louver against door.

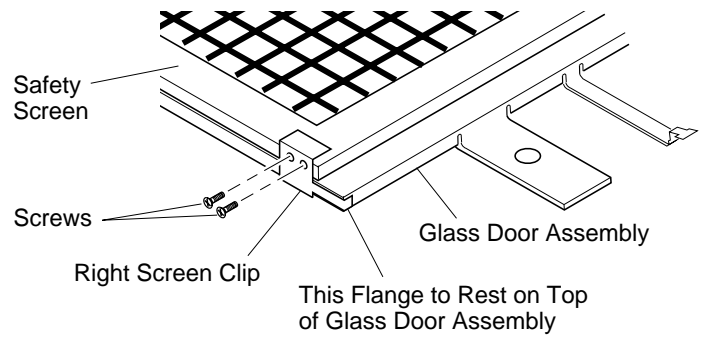


Figure 4 - Attaching Upper Clip to Safety Screen and Glass Door Assembly (Right Side Shown)

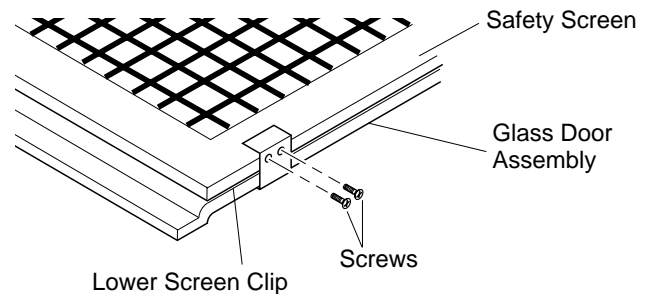


Figure 5 - Attaching Lower Clip to Safety Screen and Glass Door Assembly (Right Side Shown)

DESA
INTERNATIONAL

2701 Industrial Drive
P.O. Box 90004
Bowling Green, KY 42102-9004
www.desatech.com



NOT A UPC

105733-01
REV. A
07/99